



CTR/2 - FILLER BREATHER WITH STRAINER - TANK TOP MOUNT

Cod.	Description
CTR/2	Filler breather without safety chain packed in plastic bag
CTR/2/C	Filler breather with safety chain packed in plastic bag

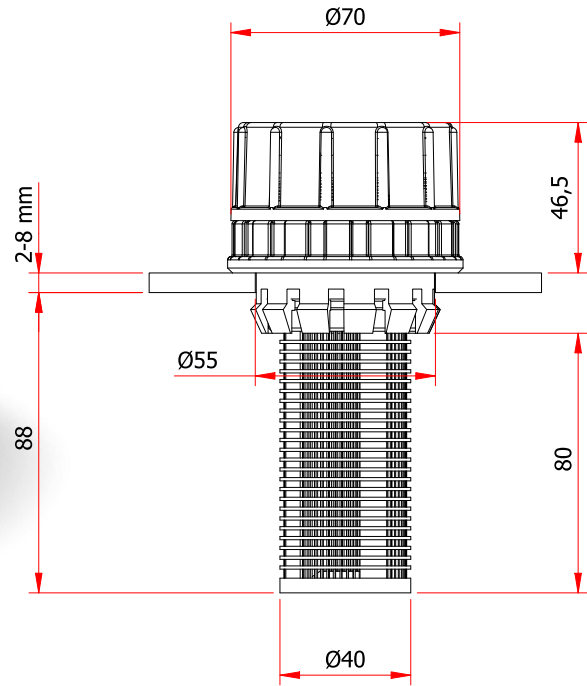

plastic filler breathers

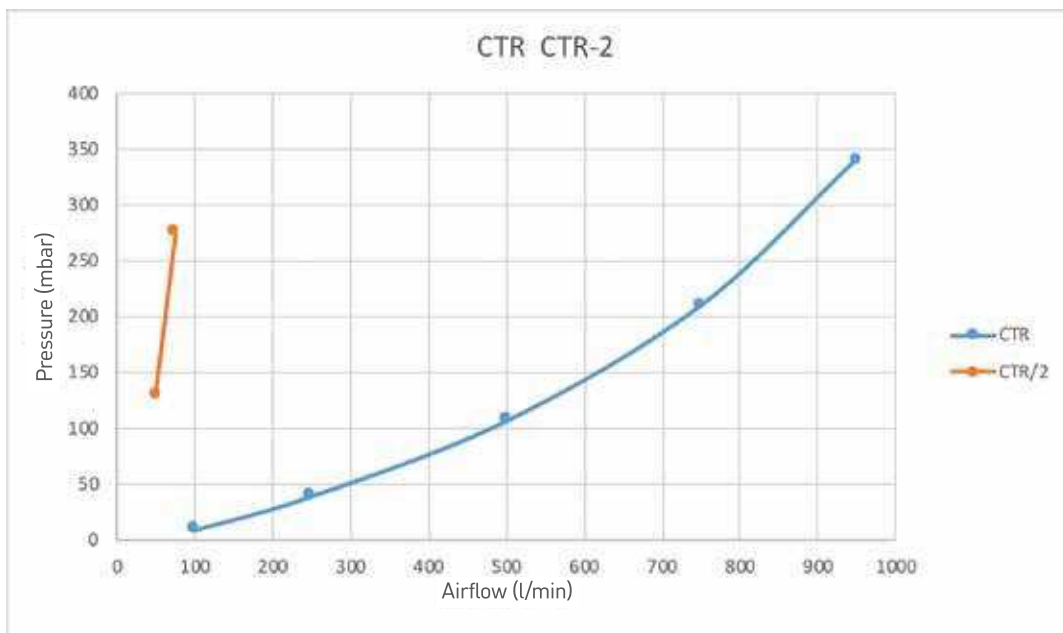

Filler breather for tank-top installation with strainer.

- **Top cap with breather:** made from Polyamide 66 black color, which is connected to the fixing base by screwing; Polyurethane foam air filter.

- **Main body:** manufactured from technopolymer black color contains threaded locking ring and inside locking ring, is placed in a pre-drilled hole ($\varnothing 55 \text{ mm} \pm 0,3 \text{ mm}$) on to the tank top. Tanktop thickness must be min 2 mm. max 8 mm. With this model drilling and tapping of mounting holes is

not needed. Safety chain available, which connects the cap to the body, preventing misplacements of the cap when removed.

- **Strainer:** in Polypropilene, hooked to the fixing block, for oil pre-filtration in phase of loading.

- **Maximum working temperature:** 80°C/176 °F.

- **Airflow capacity:** up to 75 Liters/min (see data and graphic).