


XL/10 - VERTICAL LEVEL GAUGE WITH METAL CASING

XL/10T - VERTICAL LEVEL GAUGE WITH THERMOMETER AND METAL CASING

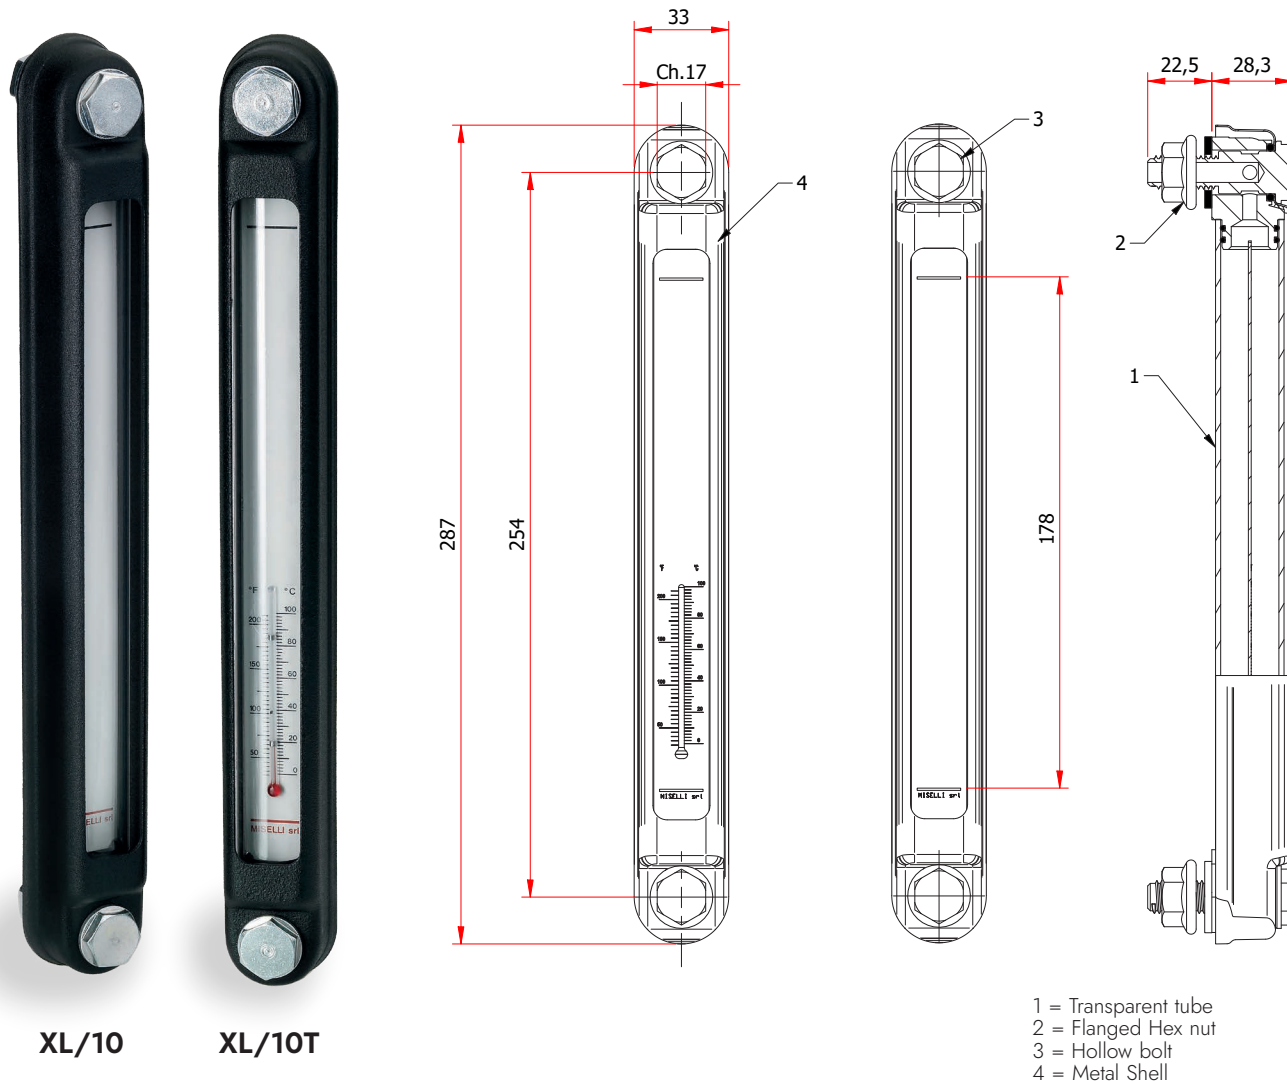

Vertical level gauge 254 mm (10") designed for use on tanks and power packs.

Material: transparent internal tube made from Polycarbonate (PC), compatible with mineral and synthetic oils, hydraulic fluids, fluids containing glycole; limited resistance to unleaded fuel and diesel.

Bolts and flanged nuts: zinc plated steel.

Sealing: O-rings and flat rubber washers NBR 70 Shore.

External case: painted black steel.

Thermomenter: possibility to check both the fluid level and its temperature by a inside capillary thermometer scaled in degree Celsius 0-100° C and Fahreneit 50-200°F.

Max working temperature: 90°C/194°F (test made up 1 bar /14,5 PSI of pressure). In case of use under pressure and/or temperature conditions, contact the technical service Miselli srl.

Assembling instructions: the mounting of the level gauge can be made externally by providing 2 threaded holes M12 on 254 mm center distance, tolerance $\pm 0,2$. Alternatively they can be secured internally through 2 plain holes 12,5 mm ($\pm 0,2$).

Max tightening torque suggested: 3 Nm.

Special versions

XL-T/10/G with the transparent tube made in glass resistant to aggressive liquids.

XL-T/10/RB with floating red ball to improve the visibility of the fluid level of light colored liquids.

XL-T 10/V sealing FKM type VITON®.

XL-T/10/INOX provided with stainless steel nuts and bolts suitable for applications in corrosive environments such as marine.