


XLP - CUSTOMIZABLE LEVEL GAUGE FOR SMALL OVERALL DIMENSION

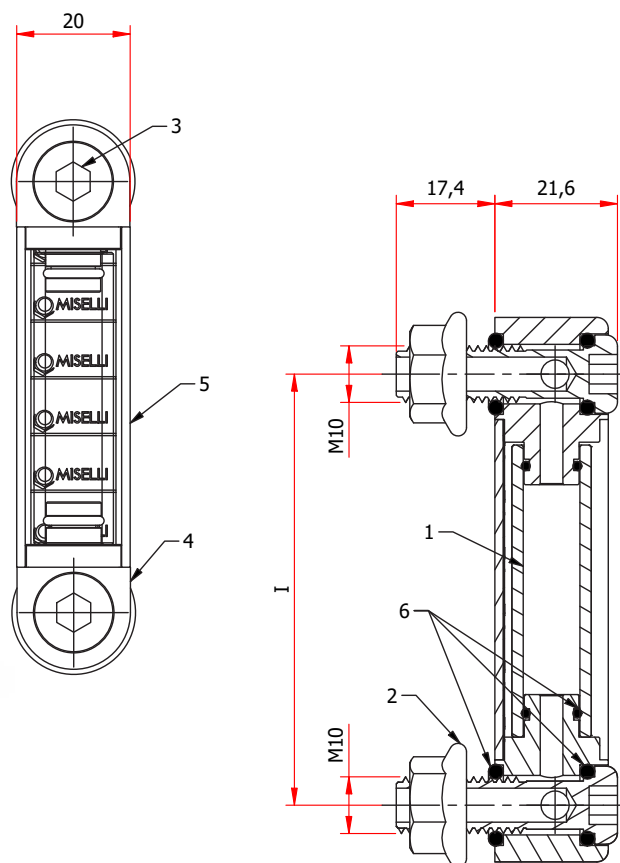

1 = Transparent tube
 2 = Flanged hex nut
 3 = Screw with socket hexagon

4 = Assembling end cap
 5 = Aluminum U-shape external case
 6 = O-Rings

Vertical level gauge, available with customized lengths, designed for use on small tanks. Excellent visibility thanks to transparent assembling end caps. Suggested for center-to-center distance lower than 254 mm.

Material: transparent polycarbonate tube, compatible with mineral and synthetic oils, hydraulic fluids, fluids containing glycole; limited resistance to unleaded fuel and diesel. Behind the tube is placed a graduated contrast screen to allow an accurate view of the level.

Bolts and flanged nuts: zinc plated steel, M10.

Sealing: O-ring NBR 70 Shore.

External case: Aluminum U-shape.

Assembling end caps: transparent polyamide.

Assembling instructions: the mounting of the level gauge can be made externally by providing 2 threaded holes M10 on the center distance, tolerance $\pm 0,2$. Alternatively they can be secured internally through 2 plain holes 10,5 mm ($\pm 0,2$).

Max tightening torque suggested 3 Nm.