


TCSZF(A) - KNURLED OIL FILL PLUG WITH BREATHER AND ANTI-SPLASH DISC

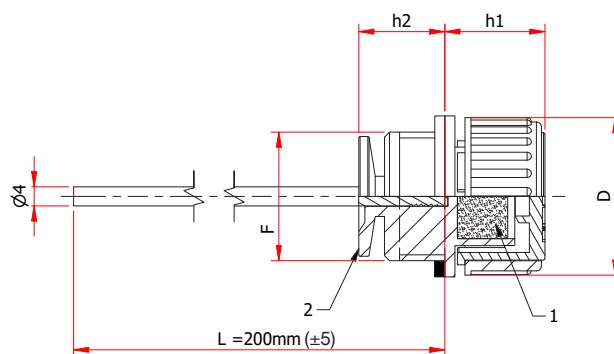

1 = Breather hole
2 = Antisplash disc

plastic filler breathers

Plastic knurled head threaded filler breather ensuring high mechanical resistance at both low and high temperatures, dimensional stability and shocks resistance. Incorporated anti-splash disc, positioned under the thread, will reduce spillage when heavy oil movement in the reservoir or gearbox take place.

Material: Polyamide PA66.

Sealing: flat gasket NBR 90 Shore.

Maximum working temperature: 100°C/212°F.

Filter: polyurethane foam filter element prevents

contaminations from the ambient atmosphere polluting the oil.

Airflow rate "P": indicated in the table expressed in Lt/min measured at a pressure of 50 mbar/0,73 PSI.

Special versions

Level dipstick: cylindrical section with zinc steel phosphated surface, standard length 200 mm, with customizable length with MIN-MAX notches.

	Cod.	F	D	h1	h2	P	Pack.
	TCSZF/14	G 1/4"	21,5	16	11	NR	100
	TCSZF/38 TCSZF/38+A	G 3/8"	21,5	16	13	35	100
	TCSZF/12 TCSZF/12+A	G 1/2"	24	11,50	14	100	100
	TCSZF/34 TCSZF/34+A	G 3/4"	31	19	13,5	80	50
	TCSZF/1 TCSZF/1+A	G 1"	38	16	19,5	250	50
	TCSZF/14.15	M14x1,5	21,5	16	11	NR	100