
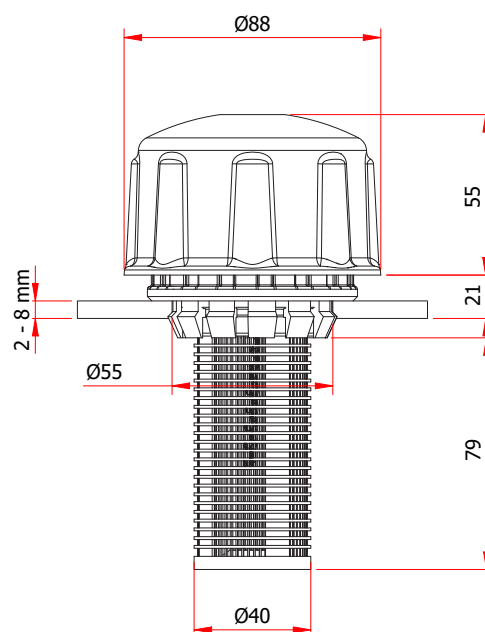


CTR - FILLER BREATHER WITH STRAINER - TANK TOP MOUNT

Cod.	Description
CTR	Filler breather without safety chain packed in plastic bag
CTR/C	Filler breather with safety chain packed in plastic bag

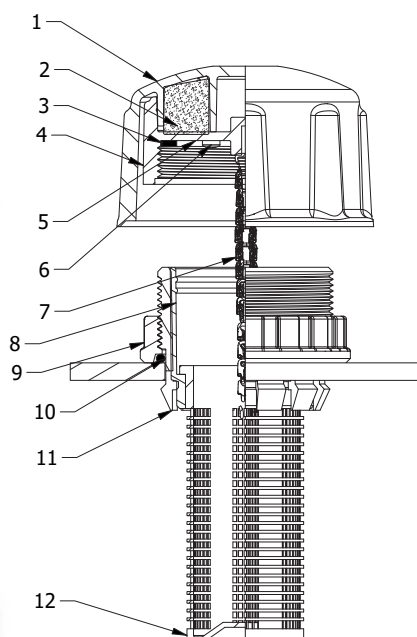

plastic filler breathers

Filler breather for tank-top installation with strainer.

Top cap with breather: made from Polyamide 66 black color, which is connected to the fixing base by screwing; Polyurethane foam air filter.

Main body: manufactured from technopolymer black color contains threaded locking ring and inside locking ring, is placed in a pre-drilled hole ($\varnothing 55 \text{ mm} \pm 0,3 \text{ mm}$) on to the tank top. Tanktop thickness must be min 2 mm. max 8 mm. With this model drilling and

tapping of mounting holes is not needed. Safety chain available, which connects the cap to the body, preventing misplacements of the cap when removed.

Strainer: in Polypropilene, hooked to the fixing block, for oil pre-filtration in phase of loading.

Maximum working temperature: 80°C/176 °F..

Airflow capacity: up to 950 Liters/min (see data and graphic p. 56).

1 Filler breather cap	7 Safety chain
2 Polyurethane air filter	8 Quick fastening coupling
3 Inner Cap threaded M60x2	9 Locking ring (external)
4 NBR flat seal	10 O-Ring
5 Breather holes	11 Internal locking ring
6 Self tapping screw (3x)	12 Filtering basket