

TPB - "LOW PROFILE" PUSH-FIT FILLER PLUG

TPBS - "LOW PROFILE" PUSH-FIT FILLER BREATHER

TPBSF - "LOW PROFILE" PUSH-FIT FILLER BREATHER WITH FILTER




plastic filler breathers

TPBSF



1 = Air filter

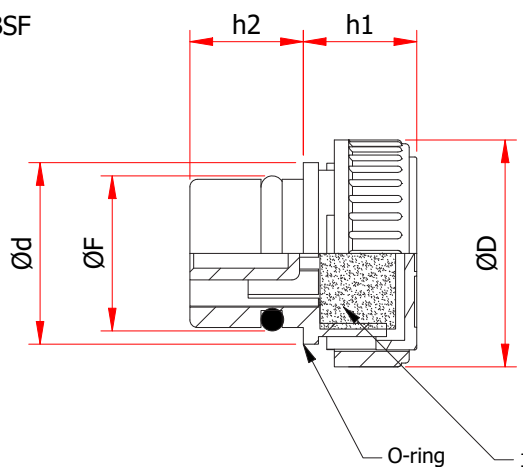

Knurled "low-profile" filler plug, applied where overhead space is limited. Push-fit mounting into drilled hole (refer to corresponding sizes shown in the table below) tolerance $\pm 0,1$ mm with $1/45^\circ$ chamfer.

Material: Polyamide PA66.

Sealing: O-ring NBR 70 Shore.

Maximum working temperature: 100°C/212°F.

Breather: six vents located on the bottom of plug's head.

Filter: Polyurethane air filter located under the lid.

Special versions

Lid: possible customization of color, logo or neutral version.

Cod.	Cod.	Cod.	F	D	d	h1	h2	Pack.
TPB/18	TPBS/18	TPBSF/18	18	30	23	14,5	14	100
TPB/20	TPBS/20	TPBSF/20	20	30	24	14,5	15,5	100
TPB/26	TPBS/26	TPBSF/26	26	30	30	14,5	16,5	50
TPB/30	TPBS/30	TPBSF/30	30	30	34	14,5	17	50