

TPBA - "LOW PROFILE" PUSH-FIT FILLER PLUG WITH DIPSTICK

TPBAS - "LOW PROFILE" PUSH-FIT FILLER BREATHER WITH DIPSTICK

TPBAF - "LOW PROFILE" PUSH-FIT FILLER BREATHER WITH FILTER AND DIPSTICK


plastic filler breathers



TPBAF



1 = Air filter

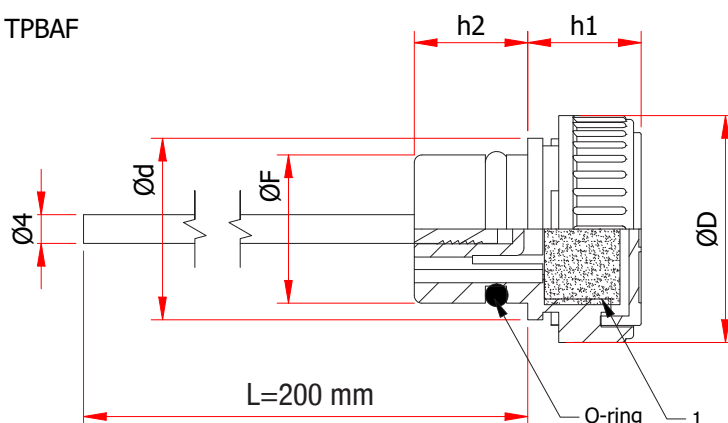

Knurled "low-profile" filler plug, applied where overhead space is limited. Push-fit mounting into drilled hole (refer to corresponding sizes shown in the table below) tolerance $\pm 0,1$ mm with $1/45^\circ$ chamfer.

Material: Polyamide PA66.

Sealing: O-ring NBR 70 Shore.

Maximum working temperature: 100°C/212°F.

Breather: six vents located on the bottom of plug's head.

Filter: Polyurethane air filter located under the lid.

Level dipstick: cylindrical section with zinc steel phosphated surface, standard length 200 mm.

Special versions

Level dipstick: customizable length with MIN-MAX notches.

Flex: blade-style level dipstick with zinc phosphated surface, customizable laser inscriptions. Flexible dipstick is suitable for applications that require special shaped profile.

Lid: possible customization of color, logo or neutral version.

Cod.	Cod.	Cod.	F	D	d	h1	h2	d1	Pack.
TPBA/18	TPBAS/18	TPBAF/18	18	30	23	14.5	14	4	100
TPBA/20	TPBAS/20	TPBAF/20	20	30	24	14.5	15,5	4	100
TPBA/26	TPBAS/26	TPBAF/26	26	30	30	14.5	16,5	4	50
TPBA/30	TPBAS/30	TPBAF/30	30	30	34	14.5	17	4	50