

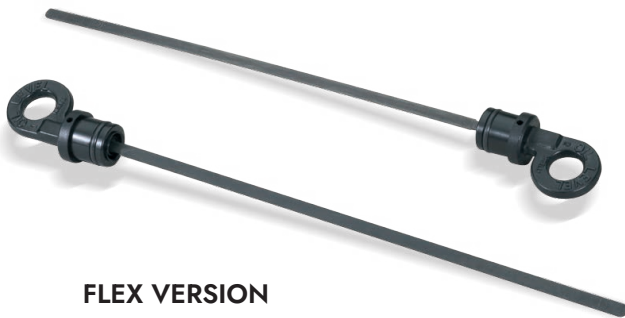
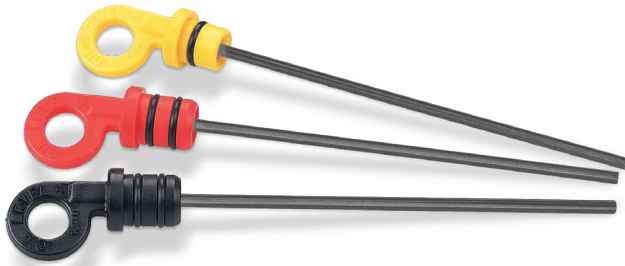


AL(S)/1 – OIL LEVEL DIPSTICK, PUSH-FIT ONE SEAL


AL(S)/2 – OIL LEVEL DIPSTICK, PUSH-FIT TWO SEALS

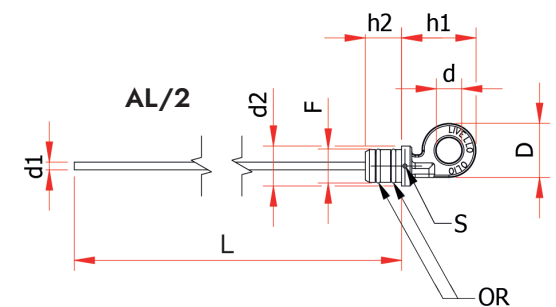

FLEX VERSION

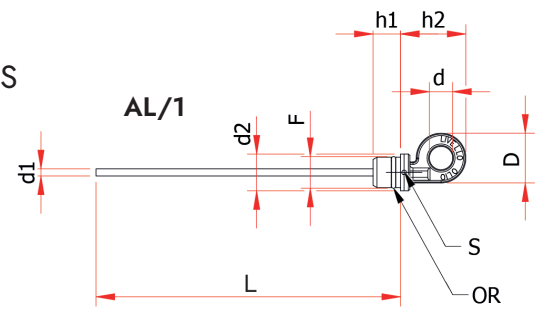

S = Breather hole
OR = O-Ring

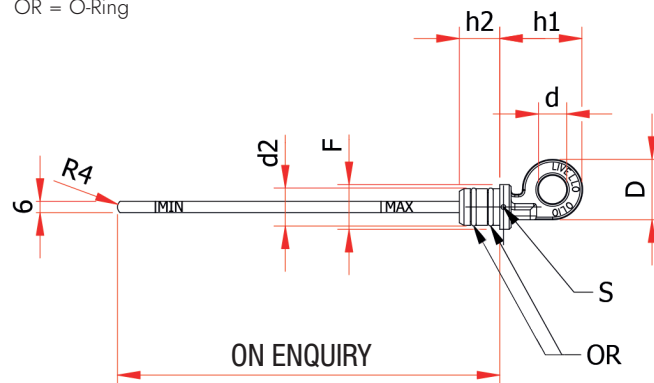

plastic filler breathers

Push-fit dipstick with eye-handle, ensuring high mechanical resistance at both low and high temperatures, dimensional stability and shocks resistance.

Material: Polyamide PA66.

Sealing: O-ring NBR 70 Shore.

Maximum working temperature: 100°C/212°F.

Breather: model ALS provided with one or two breather holes located on to the shoulder of the dipstick handle.

Level dipstick: cylindrical section with zinc steel phosphated surface.

Special versions

Level dipstick: customizable length with MIN-MAX notches.

Flex: blade-style level dipstick with zinc phosphated surface, customizable laser inscriptions. Flexible dipstick is suitable for applications that require special shaped profile.

	Cod.	Ø F	D	d	d1	d2	h2	h1	L	Pack.
AL/1/14	ALS/1/14	14	27	13	4	17,9	13	34	180 ±5	100
AL/1/18	ALS/1/18	18	32	14	5	23,6	17	45	180 ±5	100
AL/1/20	ALS/1/20	20	32	14	5	23,6	18	44,5	180 ±5	100
AL/1/30	ALS/1/30	30	32	14	5	33,6	17	45	190 ±5	100
AL/2/12		12	27	14	4	18	20	36	180 ±5	100
AL/2/14	ALS/2/14	14	27	13	4	18	20	34	195 ±5	100
AL/2/18	ALS/2/18	18	32	14	5	23,5	21	44	195 ±5	100
AL/2/20	ALS/2/20	20	32	16	5	23,6	21	44	180 ±5	100