





FSB - FILLER BREATHERS CAP WITH STRAINER

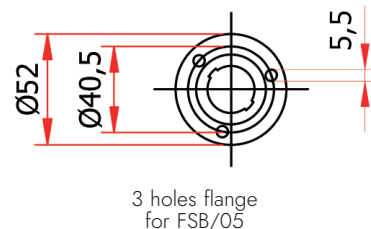



FSB/05

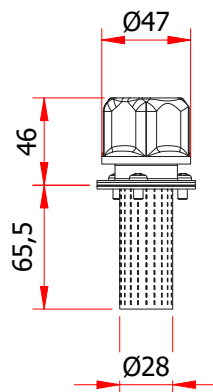

FSB/25

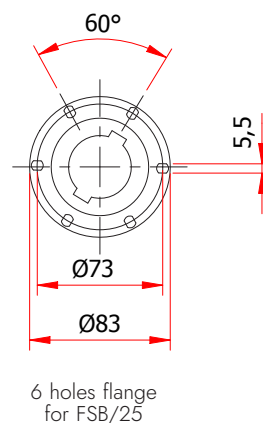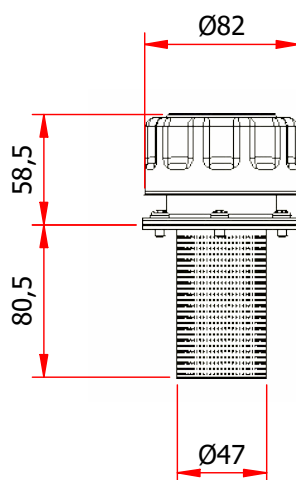

FSB/25 BM

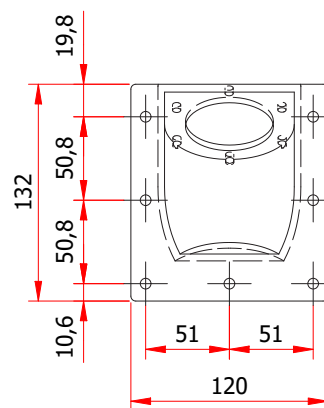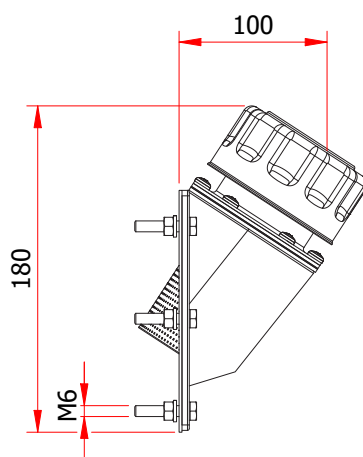

Filler breather cap with air filter. Mounting with flange and self tapping M5 screws, bayonet connection.

Material: chromed steel.

Filter: air filter element made of polyurethane foam, filtration degree 40 microns (10 microns on request).

Filtering strainer: 800 µ filtration degree.

Sealing: Cork.

Airflow capacity: up to 950 Liters/min (see data and graphic page 73).

Special versions

FSB/25-SD: with welding flange.

FSB/25-38: with removable metal filtering strainer.

FSB/25-150: with 150 mm metal filtering strainer.

FSB/25-L: with predisposition ring for safety lock.

FSB/25-L+C: supplied with safety lock.

FSB/25-G: with NBR flat seals.